Drying Cabinet ProLine





Main Data	TS 63 VP			
Capacity, kg (lbs)	8 (17.6)			
Hanging length, m (ft)	16 (52.5)			
Part no	131031			
Consumption data, normal temperature*				
Drying time, min	58			
Energy consumption, kWh	1.7			
Drying capacity, g/min (oz/min)	45 (1.59)			

^{*}Drying of 6 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0% residual moisture

TS 63 VP

Energy Efficient Drying Cabine

ProLine TS 63 VP is a new, unique drying cabinet with a heat pump. It has a very low energy consumption of 1.7 kWh.

The drying cabinet is equipped with a Humidity Tracking System (HTS) which senses the humidity level and stops the drying process when the laundry is dry.

Drying cabinets are ideal for drying delicate garments that should not be tumble dried. ProLine TS 63 VP dries efficiently without friction which extends the life-span of the garments. The drying cabinet is equipped with four automatic programs.

Details

- Capacity 8 kg (17.6 lbs)
- Hanging length 16 m (52.5 ft)
- Width, 120 cm (47 inch)
- HTS Humidity Tracking System
- · Gentle drying mode
- Four automatic programs
- · Hanging rail rotates out 180° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- · Delivered semi-mounted, top packed as an assembling kit

About PODAB

PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.


Contact us

If you have any questions, please feel free to contact us on 020 8936 7083. You can also visit or website at www.podab.co.uk.












Drying Cabinet		TS 63 VP	
Electrical connections	Phase/Voltage/Frequency	3~N/400V/50Hz	
	Total effect, kW	1.5	
	Fuse, A	10	
	Cable length, mm (inch)	2100 (82.7)	
Heat Pump	Drain pipe, ø mm (inch)	12 (0.47)	
	Refrigerant, type	R407C	
	Refrigerant, g (oz)	1050 (37)	
Optional extras	Single bar, art no	131070	
	Hook rack, set of three, part no	131071	
Sound level	Airborne sound level, dB(A)	56	
Weight	Net, kg (lbs)	165 (364)	
	Shipping data net, kg (lbs)	180 (397)	
Ceiling height	Minimum ceiling height, mm (inch)	2050 (80.7)	

Front Left side From above

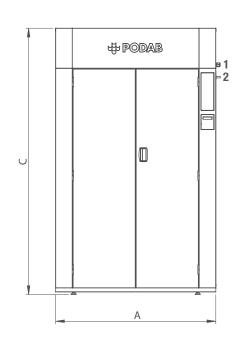

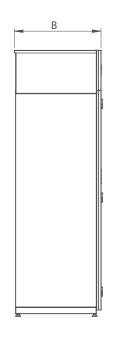

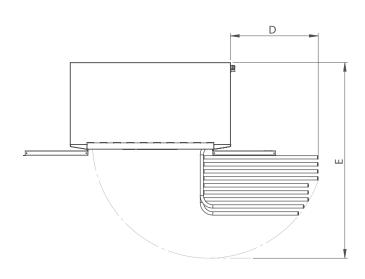

- 1. Electrical connection
- 2. Drain pipe

Dimensions in mm (inch)	A	В	C	D	E
	Width	Depth	Height	Width with hanging rail	Depth hanging rail
TS 63 VP	1200 (47.2)	650 (25.6)	1955 (77)	1857 (73.1)	1465 (57.7)



2015-11-30. Changes can be made without prior notice.





